

电池产品规格书

BATTERIES SPECIFICATIONS

产品型号(MODEL NO.): GMCELL-LR03 1.5V

文件标号(FILE NO.): GMCELL14-D-SA-04

客户编号(CUSTOMER NO.): _____

制定(PREPARED): _____

审核(CHECKED): _____

批准(APPROVED): _____

客户审批 Customer Approved	审核 CHECKED	
	批准 APPROVED	
	请签名盖章确认后回传我司 Please sign and return one copy to us	盖章处 Seal the

GMCELL reserve the right to alter or amend the design, model and specification without prior notice
高巨能公司保留在没有预先通知的情况下改变和修正设计及规格说明书的权力。

深圳市高巨能科技有限公司
SHENZHEN GMCELL TECHNOLOGY CO., LTD

电话(TEL): +86 0755-29497371

传真(FAX): +86 0755-23703178 邮编(POST CODE): 518101

地址: 广东省深圳市宝安区新安街道 46 区华创达

ADD: Huachuangda Industrial District, 46 District Xin'an Street, Bao'an, Shenzhen, China

E-mail: yuanxiangfeng123@126.com

<http://www.gmcell.net>

修订履历

MODIFIED LIST

产品变更履历表
Product Modified Record List

Revision 版本	Date 日期	Mark 标记	Modified content 变更内容	Approved by 批准
V1.0	2022-8-1			

产品简介
Product Specification

品名: LR03 无汞碱性电池
电化学体系: 锌-锰系列
标称电压: 1.5V
电池总高: 43.3~44.5mm
电池直径: 9.5~10.5mm
包装: 铝膜
保质期: 5年

Description: LR03 Mercury free Alkaline Battery
Chemical System: Zinc-Manganese Dioxide
Nominal Voltage: 1.5V Capacity: 800mah
Nominal Height: 43.3~44.5mm
Nominal Dimension: 9.5~10.5mm
Jacket: Foil Label
Shelf Life: 5 Year

电性能特征 Electrical Characteristics


贮存环境 Storage Condition	初始期 Initial within 30day	贮存 12 个月 After 12months at 20±2℃
开路电压 Open-circuit voltage	1.550~1.650	1.500~1.650
20Ω continuous discharge End-point voltage: 0.9V	≥17.5h	≥16.5h
10Ω continuous discharge End-point voltage: 0.9V	≥7.5h	≥7.0h
3.9Ω continuous discharge End-point voltage: 0.9V	≥140min	≥120min

包装资料 Packing Information


PACK	PCS/BOX	PCS/CTN	SIZE/CNT(cm)	G.W./CNT(kg)
LR03/2S	60	1200	28.0*26.3*11.2	14.0

LR03 “AAA” SIZE 放电曲线

3.9Ω Continuous Discharge Curve

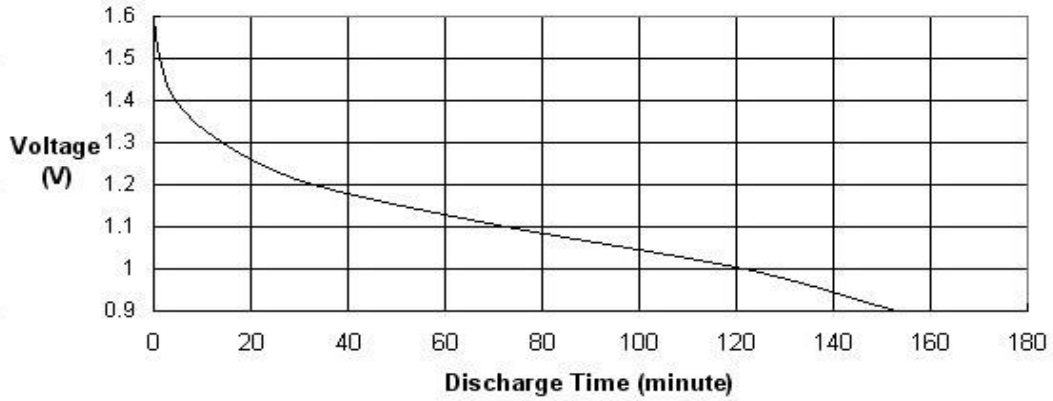

10Ω Continuous Discharge Curve

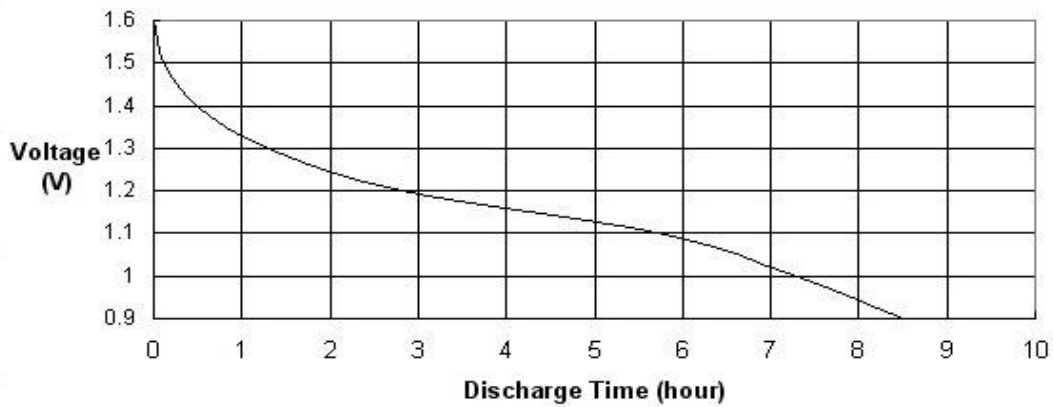

20Ω Continuous Discharge Curve

