

# 电池产品规格书

## BATTERIES SPECIFICATIONS

产品型号(MODEL NO.): <b><u>GMCELL-LR6 1.5V</u></b>
文件标号(FILE NO.): <b><u>GMCELL14-D-SA-03</u></b>
客户编号(CUSTOMER NO.): _____ 制定(PREPARED): _____
审核(CHECKED): _____
批准(APPROVED): _____

客户审批 Customer Approved	审核 CHECKED	
	批准 APPROVED	
	请签名盖章确认后回传我司 Please sign and return one copy to us	盖章处 Seal the

GMCELL reserve the right to alter or amend the design, model and specification without prior notice  
高巨能公司保留在没有预先通知的情况下改变和修正设计及规格说明书的权力。

深圳市高巨能科技有限公司

SHENZHEN GMCELL TECHNOLOGY CO., LTD

电话(TEL): +86 0755-29497371

传真(FAX): +86 0755-23703178 邮编(POST CODE): 518101

地址: 广东省深圳市宝安区新安街道 46 区华创达

ADD: Huachuangda Industrial District, 46 District Xin'an Street, Bao'an, Shenzhen, China

E-mail: yuanxiangfeng123@126.com

<http://www.gmcell.net>

修订履历

MODIFIED LIST

产品变更履历表  
Product Modified Record List

Revision 版本	Date 日期	Mark 标记	Modified content 变更内容	Approved by 批准
V1.0	2022-8-1			

**产品简介**  
**Product Specification**

品名: LR6 无汞碱性电池  
 电化学体系: 锌-锰系列  
 标称电压: 1.5V  
 电池总高: 49.2~50.5mm  
 电池直径: 13.5~14.5mm  
 包装: 铝膜  
 保质期: 5年

Description: LR6 Mercury free Alkaline Battery  
 Chemical System: Zinc-Manganese Dioxide  
 Nominal Voltage: 1.5V Capacity: 2100mah  
 Nominal Height: 49.2~50.5mm  
 Nominal Dimension: 13.5~14.5mm  
 Jacket: Foil Label  
 Shelf Life: 5 Year

**电性能特征 Electrical Characteristics**


贮存环境 Storage Condition	初始期 Initial within 30day	贮存 12 个月 After 12months at 20±2℃
开路电压 Open-circuit voltage	1.550~1.650	1.500~1.650
10Ω continuous discharge End-point voltage: 0.9V	≥18.5h	≥17.5h
3.9Ω continuous discharge End-point voltage: 0.9V	≥360min	≥330min
43Ω 4hour/day discharge End-point voltage: 0.9V	≥80h	≥72h

**包装资料 Packing Information**


PACK	PCS/BOX	PCS/CTN	SIZE/CNT(cm)	G.W./CNT(kg)
LR6/2S	60	720	30.2*18.1*17.7	17.5

## LR6 “AA” SIZE 放电曲线

10Ω Continuous Discharge Curve

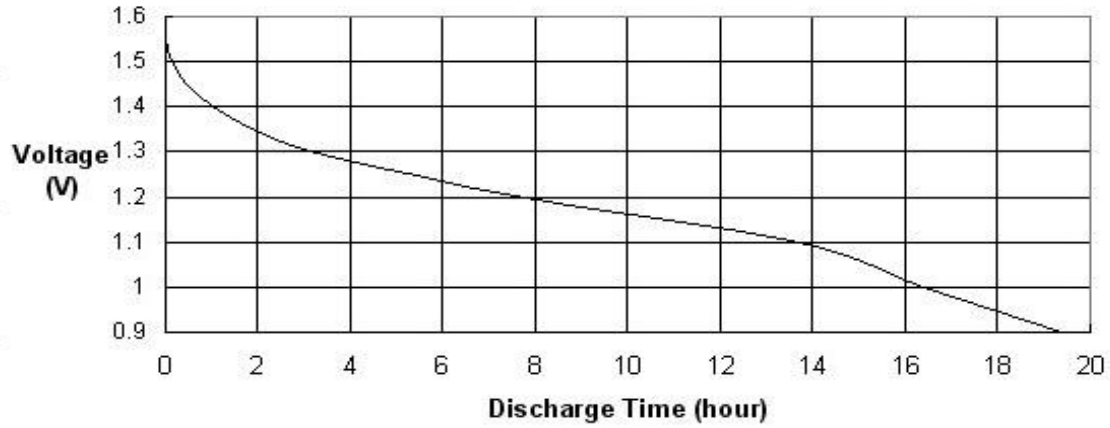

3.9Ω Continuous Discharge Curve

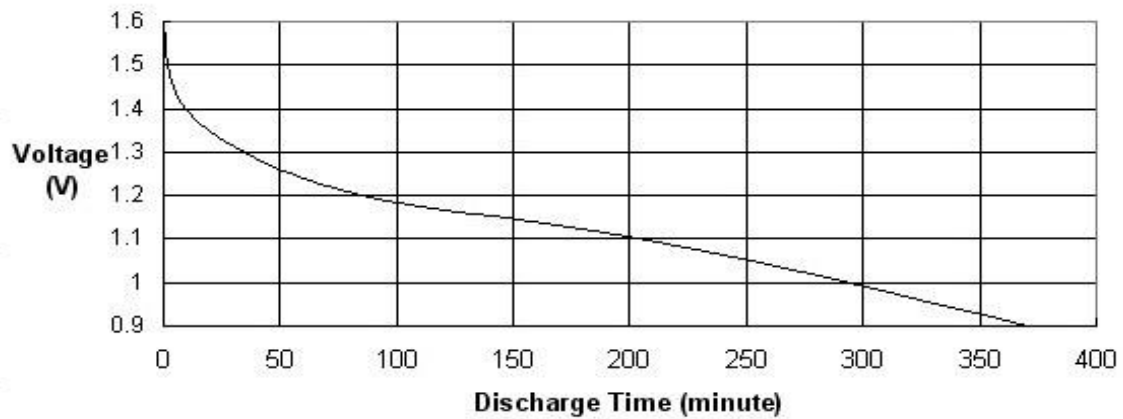

43Ω 4hour/day Discharge Curve

